

Shocker PASS

POSITIVE AIR SHUTOFF SYSTEM

SHOCKER POSITIVE AIR SHUTOFF SYSTEM

X-Body Internally Switched Kits

X-Body Internally-Switched Kits

REGULAR CONFIGURATION



- Switch up - Valve closed / Switch down - Valve open
- No cable maintenance
- Fast 2 wire installation
- No control modules or relay's

Each kit includes:


- Valve
- Toggle switch & cover
- Auto reset breaker & cover
- 2 clamps
- One Year All Inclusive Parts Warranty

INLINE CONFIGURATION



- 1.5" to 4.0" auto reset
- Internally switched 12V or 24V switches from PULL to HOLD automatically.
- Valve function unaffected by orientation

INTERNALLY SWITCHED SOLENOID WIRING DIAGRAM

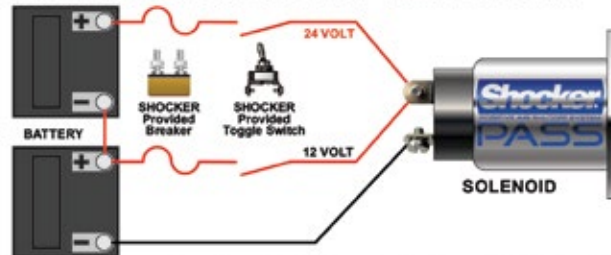

Use crimp type connectors & heat shrink tube on both 12V and 24V Solenoids.

WIRE SIZE RECOMMENDATION TABLE

Maximum lead length (in feet)

	14 GA	12 GA	10 GA	8 GA	6 GA
12 V DC	9.5	15	24	38	60
24 V DC	38	60	96	150	240

IMPROPER GROUNDING CAN CAUSE DAMAGE AND VOID WARRANTY
~ ONE YEAR PARTS WARRANTY ON SOLENOID ~

AMERICAN DISTRIBUTION CENTER LOCATED IN HASTINGS NEBRASKA

Manufactured by:
Headwind Solutions
4331 - 41 Street
Camrose, Alberta, Canada
T4V 3V8



Headwind Solutions

www.headwindsolutions.ca
sales@headwindsolutions.ca
Office: 1.780.672.2775
Toll Free: 1.844.304.7277 (PASS)
Fax: 1.780.672.6411

MADE IN NORTH AMERICA

ONE YEAR PARTS WARRANTY